
Single Blank Plate - Traditional Plate

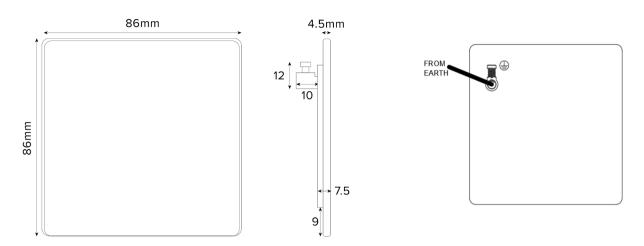

TECHNICAL SPECIFICATION

Mounting Box Depth (Min) Earth Terminal Capacity 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm² (Earth) Fixing Centres 60.3mm Size 86mm x 86mm x 4.5mm (Plate thickness) Product Class 1 Ambient Operating Temperature -5° to +40°C Recommended Location Internal Use Only Maximum Installation Altitude		
Earth Terminal Capacity 3 x 2.5mm², 2 x 4.0mm², 1 x 6.0mm² (Earth) Fixing Centres 60.3mm Size 86mm x 86mm x 4.5mm (Plate thickness) Product Class 1 Face plate must be earthed Ambient Operating Temperature -5° to +40°C Recommended Location Internal Use Only Maximum Installation Altitude 2000m	Standard(s)	BS 5733 (Where Applicable)
Fixing Centres 60.3mm Size 86mm x 86mm x 4.5mm (Plate thickness) Product Class 1 Face plate must be earthed Ambient Operating Temperature -5° to +40°C Recommended Location Internal Use Only Maximum Installation Altitude 60.3mm 10.3mm 10.3mm	Mounting Box Depth (Min)	25mm
Size 86mm x 86mm x 4.5mm (Plate thickness) Product Class 1 Face plate must be earthed Ambient Operating Temperature -5° to +40°C Recommended Location Internal Use Only Maximum Installation Altitude 2000m	Earth Terminal Capacity	$3 \times 2.5 \text{mm}^2$, $2 \times 4.0 \text{mm}^2$, $1 \times 6.0 \text{mm}^2$ (Earth)
Product Class 1 Face plate must be earthed Ambient Operating Temperature -5° to +40°C Recommended Location Internal Use Only Maximum Installation Altitude 2000m	Fixing Centres	60.3mm
Ambient Operating Temperature -5° to +40°C Recommended Location Internal Use Only Maximum Installation Altitude 2000m	Size	86mm x 86mm x 4.5mm (Plate thickness)
Recommended Location Internal Use Only Maximum Installation Altitude 2000m	Product Class 1	Face plate must be earthed
Maximum Installation Altitude 2000m	Ambient Operating Temperature	-5° to +40°C
	Recommended Location	Internal Use Only
IP Rating IP2XD	Maximum Installation Altitude	2000m
	IP Rating	IP2XD