


# 1 Gang 13A DP Switched Socket + 2 USB C+C 3.1Amp - Traditional Plate

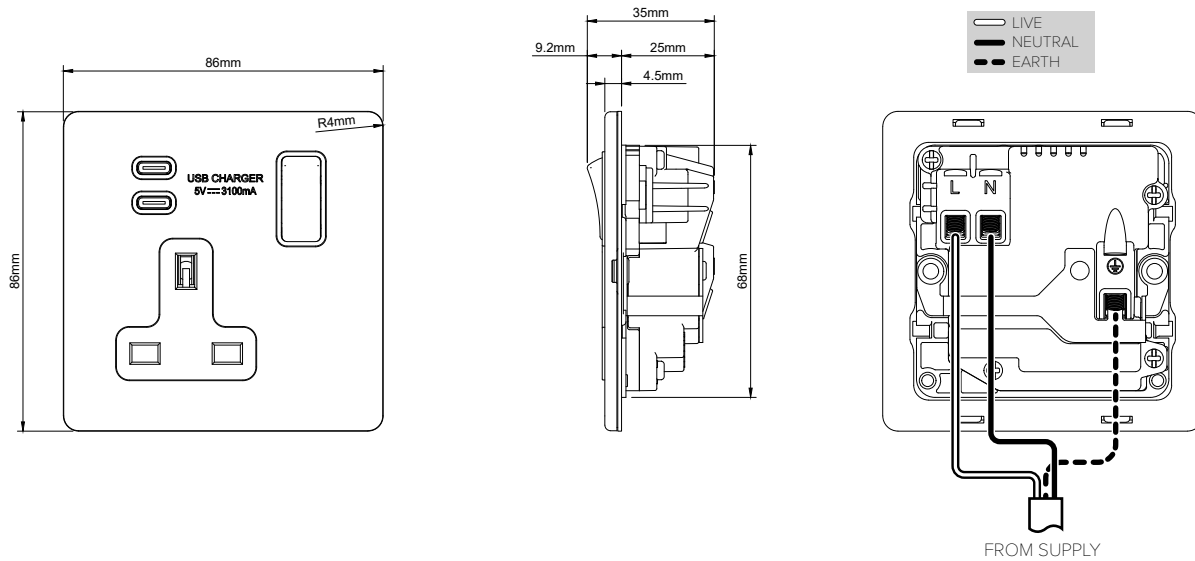

## TECHNICAL SPECIFICATION

|                               |  |
|-------------------------------|--|
| Standard(s)                   | BS 1363, BS EN 62368   |
| Voltage Rating                | 13 Amp, 250V~  |
| USB Voltage                   | 5V =   |
| USB Output Amperage           | 3.1A Shared  |
| Contact Gap                   | Normal Gap   |
| Mounting Box Depth (Min)      | 35mm   |
| Terminal Capacity             | 3 x 2.5mm <sup>2</sup> , 3 x 4.0mm <sup>2</sup> , 2 x 6.0mm <sup>2</sup> |
| Earth Terminal Capacity       | 3 x 2.5mm <sup>2</sup> , 3 x 4.0mm <sup>2</sup> , 2 x 6.0mm <sup>2</sup> |
| Outlet Protection Shutter     | Yes  |
| Fixing Centres                | 60.3mm   |
| Size                          | 86mm x 86mm x 4.5mm (Plate thickness)                                    |
| Product Class 1               | Product must be earthed  |
| Ambient Operating Temperature | -5° to +40°C   |
| Recommended Location          | Internal Use Only  |
| Maximum Installation Altitude | 2000m  |
| IP Rating                     | IP2XD  |
| Switched Poles                | Double Pole  |
| Mains Frequency               | 50hz - 60hz  |
|                               |  |