
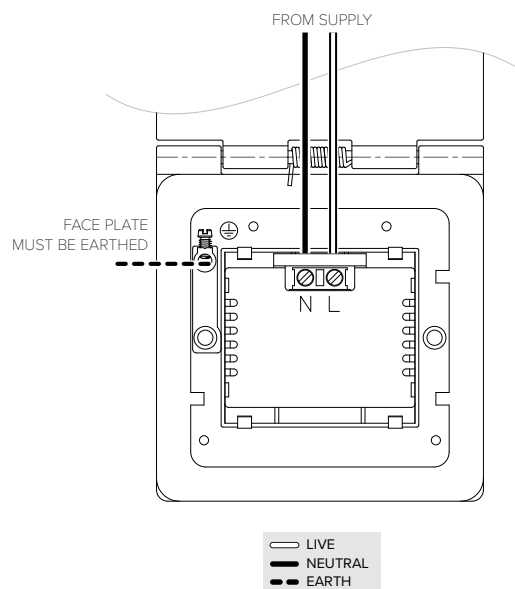
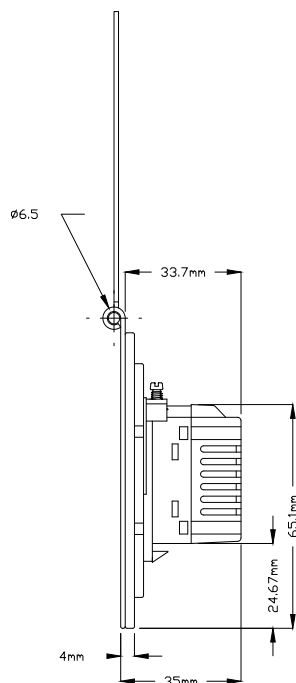


Single Euro Floor Plate (2Mod) + USB Charger Module

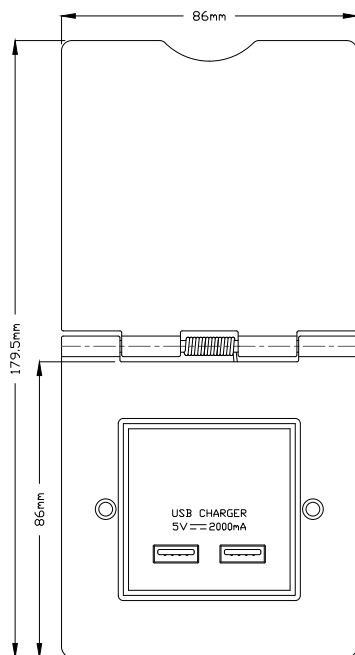

TECHNICAL SPECIFICATION

Standard(s)	BS 60950, BS 5733
Input	180-250V~, 0.2A , 50/60Hz
Output	5V --- 2000mA
Mounting Box Depth (Min)	35mm, 47mm Recommended
Terminal Capacity	1 x 1.5mm ² , 2 x 1.0mm ²
Earth Terminal Capacity	3 x 2.5mm ² , 3 x 4.0mm ² , 2 x 6.0mm ²
Fixing Centres	60.3mm
Size	86mm x 94mm x 4mm (Plate thickness)
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Switched Poles	None
Mains Frequency	50hz - 60hz